



PROTECTION RELAYS

MC30

Three phase overcurrent & earth fault relay

Three phase overcurrent & earth fault relay with programmable timecurrent curves suitable for protection of power distribution systems with insulated, resistance earthed or compensated neutral.

Rated input current selectable 1A or 5A, 50/60 Hz.

Connection through 3 CTs.

Protective Functions

- F49 : One Thermal Image element
- F50/51 : Three independent overcurrent elements
- F50N/51N : Three Earth Fault elements
- F51BF : Breaker Failure protection

Measurements

- Real Time Measurements (IA - IB - IC - Io)
- Maximum Demand and Inrush Recording (IA - IB - IC - Io)
- Trip Recording (last 20 trips with date & time)

Control

- 4 Output Relays (programmable)
- 3 Digital Inputs
- Time tagged multiple event recording
- Oscillographic wave form capture
- Blocking Outputs and Blockings Input for pilot wire selectivity coordination

Technical Characteristics

- Complete autodiagnostic program
- Display LCD 16 (2x8) characters
- 4 Leds for signalization



MICROELETTRICA

Communications

- 1 RS485 Serial communication port on rear side
- 1 RS232 Serial communication port on front panel
- Modbus RTU / IEC870-5-103 Communication Protocols

Expansion Modules (optional)

The relay support only one expansion module

- "UX10-4" 10 Digital Input and 4 Outputs Relay
- "14DI" 14 Digital Inputs
- "14DO" 14 Output Relays

Mounting

- 1 Module box (2 modules with expansion), totally draw-out execution
- IP44 protection case (on request IP54)

Power Supply Ratings

- Type 1 : 24V(-20%) / 110V(+15%) a.c. - 24V(-20%) / 125V(+20%) d.c.
- Type 2 : 80V(-20%) / 220V(+15%) a.c. - 90V(-20%) / 250V(+20%) d.c.

Software

- MCom2 Program interface for device management

Programmable Input Quantities		
In : Rated primary current of phase CTs	(1 9999)A	step 1A
Fn : System frequency/system's Pts	(50 60)Hz	
F49 (T>): Thermal Image		
Function enabling	Enable/Disable	
Temperature prealarm	Tal = (50 ÷ 110)%Tb	step 1%Tb
Thermal Image reset level	Tst = (10 ÷ 100)%Tb	step 1%Tb
Continuous admissible current	Ib = (50 ÷ 130)	step 1 %In
Warming-up Time constant	TW = (1 ÷ 60)min	step 1min
1F - 50/51 (I>): First Overcurrent Element		
Function enabling	Enable/Disable	
Current setting range	I> = (0.20 ÷ 4)	In step 0.01In
Definite trip time delay (10x[I>] in inverse time operation modes)	tI> = (0.05 ÷ 60)s	step 0.01s
Instantaneous output	≤ 0.03s	
Time current curves	Indep.Definite Time (D), IEC (A / B / C), IEEE (MI / VI / I / EI / SI)	
2F - 50/51 (I>>): Second Overcurrent Element		
Function enabling	Enable/Disable	
Current setting range	I>> = (0.50 ÷ 40)In	step 0.01In
Definite trip time delay	tI>> = (0.05 ÷ 60)s	step 0.01s
Instantaneous output	≤ 0.03s	
Automatic threshold doubling on inrush	2xI = Enable/Disable	
3F - 50/51 (IH): Third Overcurrent Element		
Function enabling	Enable/Disable	
Current setting range	IH = (0.50 ÷ 40)In	step 0.01In
Definite trip time delay	tIH = (0.05 ÷ 60)s	step 0.01s
Instantaneous output	≤ 0.03s	
Automatic threshold doubling on inrush	2xI = Enable/Disable	
1F - 50N/51N (Io>): First Earth Fault Element		
Function enabling	Enable/Disable	
Current setting range	Io> = (0.01 ÷ 4)Ion	step 0.01In
Definite trip time delay	tIo> = (0.05 ÷ 60)s	step 0.01s
Instantaneous output	≤ 0.04s	
Automatic threshold doubling on inrush	Indep.Definite Time (D), IEC (A / B / C), IEEE (MI / VI / I / EI / SI)	

2F - 50N/51N (Io>>): Second Earth Fault Element

Function enabling	Enable/Disable	
Current setting range	$I_{o>>} = (0.01 \div 9.99) I_{on}$	step 0.01 I_{on}
Definite trip time delay	$t_{Io>>} = (0.05 \div 60)s$	step 0.01s
Instantaneous output	$\leq 0.04s$	


3F - 50N/51N (IoH): Third Earth Fault Element

Function enabling	Enable/Disable	
Current setting range	$I_{oH} = (0.01 \div 9.99) I_{on}$	step 0.01 I_{on}
Definite trip time delay	$t_{IoH} = (0.05 \div 60)s$	step 0.01s
Instantaneous output	$\leq 0.04s$	

Breaker Failure Element

Trip time delay	$t_{BF} = (0.05 \div 0.75)s$	step 0.01s
-----------------	------------------------------	------------

Connection Diagram

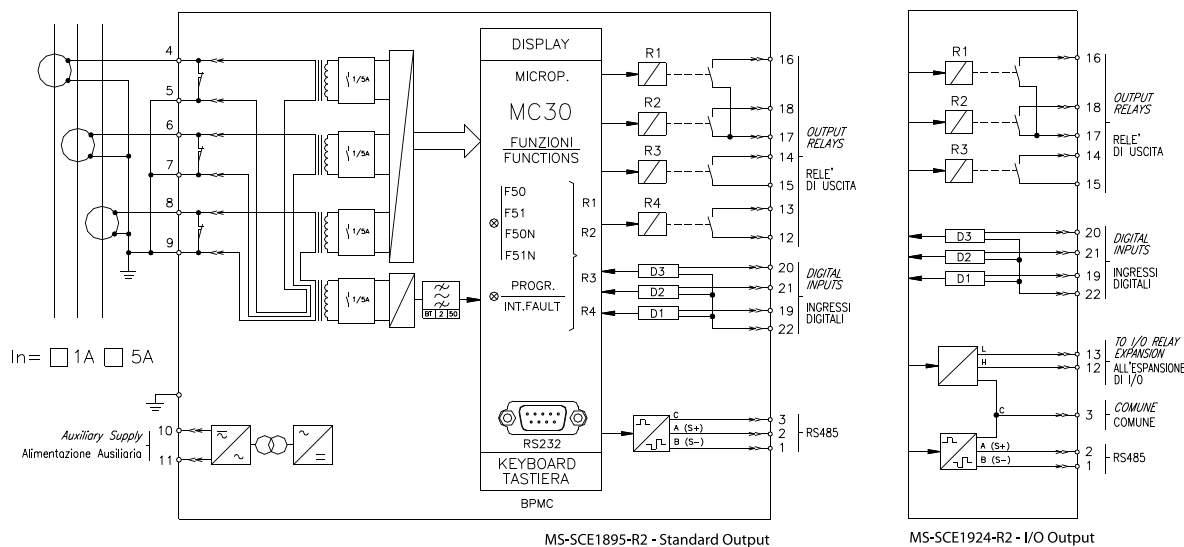

Typical Characteristics

Accuracy at reference value of influencing factors	2% I_n - 0.2% O_n	for measurements
	2% + ($t_o = 20 \div 30ms @ 2xI_s$)	for times
Rated Voltage	$I_n = 1A/5A$ - $O_n = 1A/5A$	
Voltage Overload	400A for 1 sec; 20A continuous	
Burden on voltage input	0.1VA a $I_n = 1A$; 0.3VA a $I_n = 5A$	
Average power supply consumption	$\leq 7 VA$	
Output relays	rating 6A; $V_n = 250V$	
	A.C. resistive switching = 1500W (400V max)	
	make = 30 A (peak) 0.5 sec.;	
	break = 0.3 A, 110 Vcc,	
	L/R = 40 ms (100.000 op.)	

Order code - Example				
MC30	1	2	1	1
	Power Supply	Phase Rated Input Current	Zero sequence Input Current	Output Options
	1 = Type 1	1 = 1A	1 = 1A	1 = Standard (with R4)
	2 = Type 2	2 = 5A	2 = 5A	2 = UX10-4
				3 = 14DI
				4 = 14DO

The technical specifications reported are not binding and they should be agreed in the contract.

For further technical information on our products visit www.microelettrica.com

Microelettrica Scientifica S.p.A.

20090 Buccinasco (MI) , Via Lucania 2, Italy

Tel.: +39 02 575731

E-mail: info@microelettrica.com

www.microelettrica.com



 **KNORR-BREMSE**

 **NEW YORK AIR BRAKE**

 **IFE**

 **MERAK**

 **MICROELETTRICA**

 **SELECTRON**

 **KIEPE ELECTRIC**

 **EVAC**

 **ZELSKO**

 **RAILSERVICES**