

SWITCHES

STANDARD FAMILY CODE N000125P1A00

Type	N 125
Number of Poles	1 NO
Connection between poles	None
Mounting Position	Vertical
Control Voltage Rating U_c [Vdc]	110Vdc/Vac - 220Vdc/Vac ¹
Auxiliary Contact Blocks	5 NO + 5 NC
Block Type	B
Arc chute Material	Plastic shells
Main Contacts tips Material	S6
Arcing Contacts tips Material	-
Electric Diagram	TU0165/B (DC) - TU0165/C (AC)
Layout Drawing	D49516

¹ To be specified in order phase.



MICROELETTRICA


Description

Contactors with single interruption in air, electromagnetic control by power save system (economy resistor). Typical application control of all type of motor for standard or severe duty application. Control of resistive, inductive and capacitive circuits: heating, lighting, cosfi rectification, normal stand-by.
Reference Standard IEC 60947-4-1.

Electrical Characteristics				
Rated Operational Voltage Ue [Vac/Vdc]	220	380	440	600
Rated Insulation Voltage Ui [Vdc]	1000			
Conventional Free air thermal current Ith [at 40°C] ²	125			
Conventional Free air thermal current Ith [at 60°C] ²	110			
Maximum Making Capacity for 100 ms I _{ch} [kA]	2,5			
Short Circuit Withstand Current for 100 ms I _{cw} [kA]	3			
Average impedance per pole at 50 Hz [MicroOhm]	1200			
Blow out circuit type	Direct			
Electrical Characteristics 1NO pole (S6) for DC application				
Rated Operational Voltage [Vdc]	220	380	440	600
Maximum Breaking Capacity tau=15ms I _{dcmax} [A]	1250	868	750	550
Utilization Category according to IEC60947-4-1: DC1&DC3				
Rated Operational Power Pe [kW]	27,5	47,5	48,4	48,4
Rated Operational Current Ie [A]	125	125	110	81
Utilization Category according to IEC60947-4-1: DC5				
Rated Operational Power Pe [kW]	20,9	-	-	-
Rated Operational Current Ie [A]	95	-	-	-
Electrical Characteristics 1NO pole (S6) for AC application				
Rated Operational Voltage [Vac]	220	380	440	600
Maximum Breaking Capacity cosΦ=0,5 I _{acmax} [A]	2100	1216	1050	770
Utilization Category according to IEC60947-4-1: AC1&AC2&AC3				
Rated Operational Power Pe [kW] (cosΦ=0,8)	22	38	42,5	42,5
Rated Operational Current Ie [A]	125	125	121	89
Utilization Category according to IEC60947-4-1: AC4				
Rated Operational Power Pe [kW] (cosΦ=0,8)	22	32,5	32,5	32,5
Rated Operational Current Ie [A]	125	107	92	68


² Device cabled according IEC 60947 ³ Other mounting positions not allowed

Minimum clearances [mm] from:				
Rated Insulation Voltage	X	Y	Z	
1000	Metal Parts	100	50	30
	Plastic Parts	50	30	20

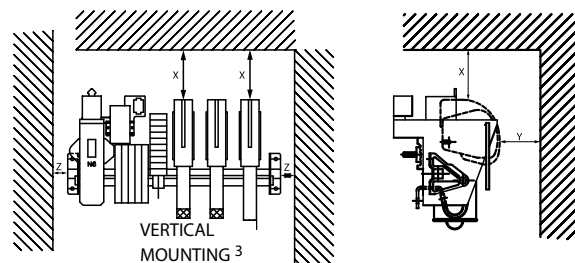

Mechanical Characteristics	
Mechanical Endurance (cycles) ⁴	3x10 ⁶
Weight [kg]	3
Control Circuit	
Control Voltage Range	0.85U _c ÷ 1.1U _c
Power Consumption (U _c and T = 20°C) at Closing - at Opening [W]	130-15
Mechanical Operation Time (U _c and T = 20°C) when Closing - Opening [ms]	50-15
Mechanical Operation Time (in the worst condition) when Closing - Opening [ms]	200-20
Time Constant (L/R) at Pick Up - when Holding [ms]	
Electrical Connections	Fast-On 6.35x0.8mm
Auxiliary Contacts	
Tips material	Solid Silver
Rated Operational Voltage [V _{ac} / V _{dc}]	250
Rated Current [A]	10
Minimum Switching Current at 16V _{dc} [mA] ⁵	100
Electrical Connections	Fast-On 6.35x0.8mm
Environmental Conditions	
Stock Temperature Range	-25°C ÷ +60°C
Operational Temperature Range	-5°C ÷ +55°C
Max Altitude without Performance Derating [m]	2000

⁴With respect of the maintenance operations ⁵ In clean and dry conditions

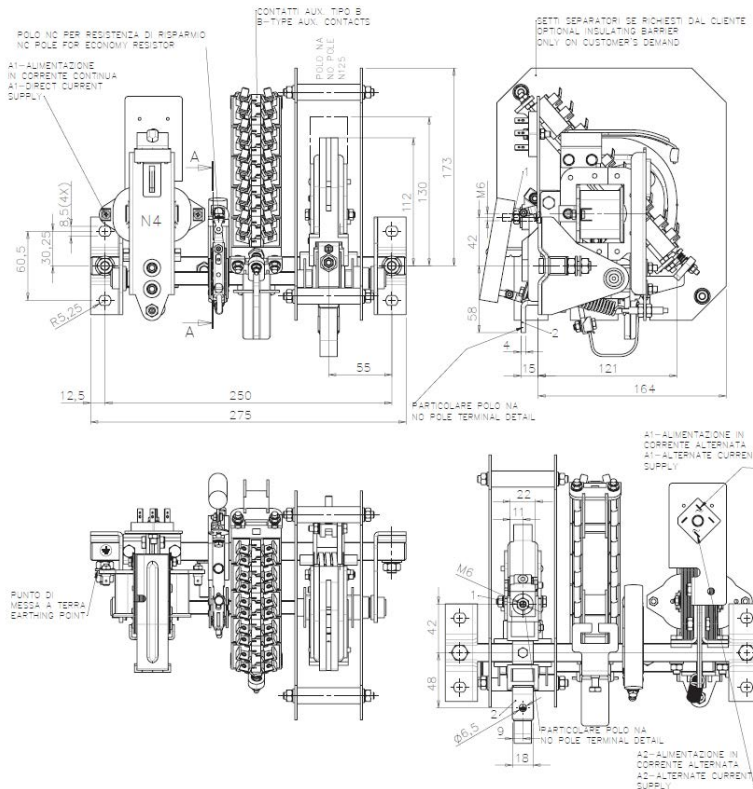

The technical specifications reported are not binding and they should be agreed in the contract.

For further technical information on our products visit www.microelettrica.com

Microelettrica Scientifica S.p.A.

20090 Buccinasco (MI) , Via Lucania 2, Italy

Tel.: +39 02 575731

E-mail: info@microelettrica.com

www.microelettrica.com



 **KNORR-BREMSE**

 **NEW YORK AIR BRAKE**

 **IFE**

 **MERAK**

 **MICROELETTRICA**

 **SELECTRON**

 **KIEPE ELECTRIC**

 **EVAC**

 **ZELISKO**

 **RAILSERVICES**