

SWITCHES

STANDARD FAMILY CODE N0001000P1B01

Type	N 1000
Number of Poles	1 NC
Connection between poles	None
Mounting Position	Vertical
Control Voltage Rating U_c [Vdc]	110Vdc/Vac - 220Vdc/Vac ¹
Auxiliary Contact Blocks	5 NO + 5 NC
Block Type	B
Arc chute Material	Plastic Shells
Main Contacts tips Material	S6
Arcing Contacts tips Material	-
Electric Diagram	TU0165/B (DC) - TU0165/C (AC)
Layout Drawing	D53550

¹To be specified in order phase.



MICROELETTRICA


Description

Contactors with single interruption in air, electromagnetic control by power-save system (economy resistor). Typical application control of all type of motor for standard or severe duty application. Control of resistive, inductive and capacitive circuits: heating, lighting, $\cos\Phi$ rectification, normal stand-by. Reference Standard IEC 60947-4-1.

Electrical Characteristics				
Rated Operational Voltage U_e [Vac/Vdc]	220	380	440	600
Rated Insulation Voltage U_i [Vdc]	1000			
Conventional Free air thermal current I_{th} [at 40°C] ²	1000			
Conventional Free air thermal current I_{th} [at 60°C] ²	870			
Maximum Making Capacity for 100 ms I_{ch} [kA]	18			
Short Circuit Withstand Current for 100 ms I_{cw} [kA]	23			
Average impedance per pole at 50 Hz [$\mu\Omega$]	480			
Blow out circuit type	Direct			
Electrical Characteristics 1NC pole (S6) for DC application				
Rated Operational Voltage [Vdc]	220	380	440	600
Maximum Breaking Capacity $\tau=15ms$ I_{dcmax} [A]	4000	2900	2500	1750
Utilization Category according to IEC60947-4-1: DC1&DC3				
Max Operational Making Current [A]	1800	1050	900	660
Max Operational Breaking Current [A]	1110	580	500	310
Electrical Characteristics 1NC pole (S6) for AC application				
Rated Operational Voltage [Vac]	220	380	440	600
Maximum Breaking Capacity $\cos\Phi=0,5$ I_{acmax} [A]	6000	3470	3000	2200
Utilization Category according to IEC60947-4-1: AC1&AC2&AC3				
Rated Power P_e [kW]	170	170	170	170
Rated Making and breaking Current I_e [A]	560	325	280	205
Utilization Category according to IEC60947-4-1: AC4				
Rated Power P_e [kW]	140	140	140	140
Rated Making and breaking Current I_e [A]	450	260	225	165

²Device cabled according to IEC 60947


Minimum clearances [mm] from:				
Rated Insulation Voltage		X	Y	Z
1000	Metal Parts	100	50	30
	Plastic Parts	50	30	20

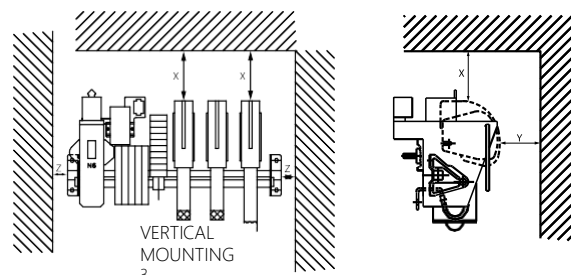

³ OTHER MOUNTING POSITIONS NOT ALLOWED

Mechanical Characteristics	
Mechanical Endurance (cycles) ⁴	1x10 ⁶
Weight [kg]	23
Control Circuit	
Control Voltage Range	0.85U _c ÷ 1.1U _c
Power Consumption (U _c and T = 20°C) at Closing - at Opening [W]	650-30
Mechanical Operation Time (U _c and T = 20°C) when Closing - Opening [ms]	90-15
Mechanical Operation Time (in the worst condition) when Closing - Opening [ms]	350-20
Electrical Connections	Fast-On 6.35x0.8mm
Auxiliary Contacts	
Tips material	Solid Silver
Rated Operational Voltage [V _{ac} / V _{dc}]	250
Rated Current [A]	10
Minimum Switching Current at 16V _{dc} [mA] ⁵	100
Electrical Connections	Fast-On 6.35x0.8mm
Environmental Conditions	
Stock Temperature Range	-25°C ÷ +60°C
Operational Temperature Range	-5°C ÷ +55°C
Max Altitude without Performance Derating [m]	2000

⁴With respect of the maintenance operations ⁵ In clean and dry conditions

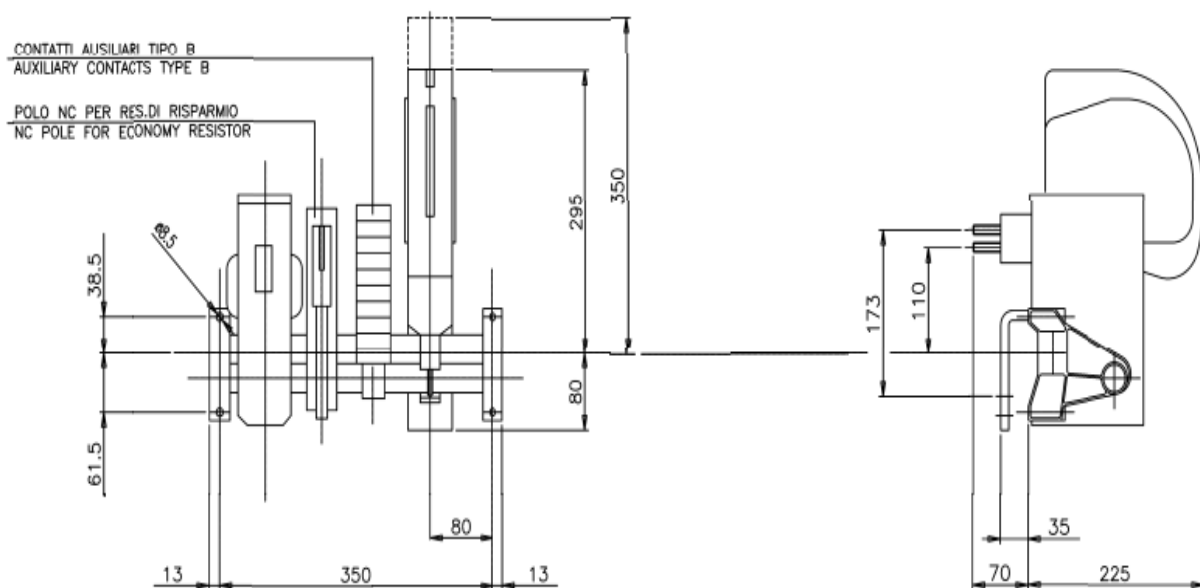

The technical specifications reported are not binding and they should be agreed in the contract.

For further technical information on our products visit www.microelettrica.com

Microelettrica Scientifica S.p.A.

20090 Buccinasco (MI) , Via Lucania 2, Italy

Tel.: +39 02 575731

E-mail: info@microelettrica.com

www.microelettrica.com



KNORR-BREMSE

NEW YORK AIR BRAKE

IFE

MERAK

MICROELETRICA

SELECTRON

KIEPE ELECTRIC

EVAC

ZELISKO

RAILSERVICES